




# Total Solutions for Analytical Instruments

*Pharmaceutical / Chemical / Petrochemical /  
Environmental / Polymer / Food & Beverage / Biological*

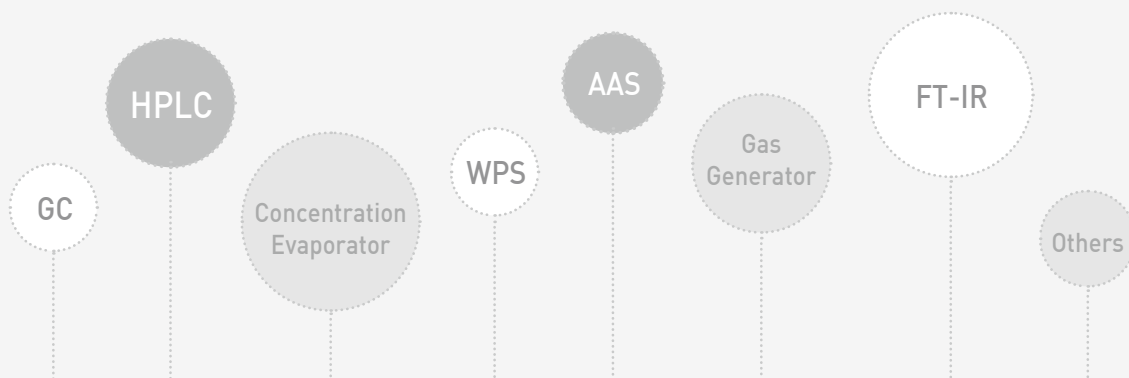

# YL6500 GC

YL6500 GC provides substantially reliable and precise data by every single part from the stable inlets to the extremely sensitive detectors as well as the innovative haptic touch pad strengthening user interface with a finger-tip. With strongly enhanced APCs (Advanced Pneumatic Control), installation of three units of inlet and detector for each enables to extend the various GC configurations to perform complex analyses. Moreover, an intuitive chromatography data system with user-friendly interface improves the ease of instrument control and a network (LAN) communication speeds up a data process.

## ■ Inlet

- Max. no. of installation: Three
  - Capillary Inlet (Split/Splitless Inlet)
  - Packed Inlet
  - On-Column Inlet(Temperature programming up to 5 steps)

## ■ APC (Advanced Pneumatic Control)

- Increased precision in gas pressure and flow rate for more reliable results
- Automatic compensation for temperature & pressure in installation condition
- Pressure setpoint increment: 0.01 psi
- Pressure stability:  $\pm 0.001$  psi

## ■ Column Oven

- Programming ramp/plateaus: 25/26
- Thermal stability:  $\pm 0.01$  °C
- Temperature program method: Max. 20

## ■ YL-Clarity CDS

- US FDA 21 CFR Part 11 compliance
- Simultaneous data acquisition up to 4 independent chromatographs /12 detectors
- Various analysis method applications
- NGA/SST/Validation kit (Option)

## ■ Detector

- Max. no. of installation: Three
  - FID (Flame Ionization Detector): MDL < 2.0 pg C/sec
  - TCD (Thermal Conductivity Detector): MDL < 2.5 ng/ml
  - ECD (Electron Capture Detector): MDL < 10 fg/sec
  - $\mu$ TCD (Micro-Thermal Conductivity Detector): MDL < 400 pg/ml
  - NPD(Nitrogen Phosphorous Detector): MDL < 0.4 pg N/sec < 0.2 pg P/sec
  - PDD (Pulsed Discharge Detector)
    - (PDHID) MDL: Organic compound < low ppb  
Permanent gas < low ppm
    - (PDECD) MDL:  $10^{-15}$
  - FPD(Flame Photometric Detector): MDL < 20 pg S/sec < 0.5 pg P/sec
  - PFPD(Pulsed Flame Photometric Detector)



# Sample Preparation System

## 6000 Series Autosampler



6000 series autosampler delivers improved productivity and enhanced analytical capacity with high precision and easy operation at low cost. It can store up to 10 methods and be easily controlled by a keyboard or YL-Clarity chromatography data system.

## Autoinjector, HT310A



HT310A is an economical solution if you need the high levels of reproducibility that an autosampler gives, but do not run large sample batches. This special version has a fixed tray that holds up to 10 sample vials and that gives the autosampler a very small footprint.

## Static Headspace Autosampler, HT200H



HT200H, available in GC or GC/MS, is useful to analyze drinking water, waste water, soil (EPA 5021), industrial waste, etc. With the static headspace design, The HT200H utilizes a heated syringe to transfer the samples from the oven directly into the injector and this virtually eliminates sample carry-over.

## Headspace, Liquid and SPME Autosampler, HT280T



HT280T is a single unit combining static headspace analysis, liquid sample injection and SPME (Solid Phase Microextraction). It can save your time and money increasing analysis flexibility.

## Gas Sampling Valve



Gas Sampling Valve



Purge Housing

In order to obtain accurate results in gas analysis, it is necessary to equip with gas sampling valves. You can install up to 4 valves on the GC and store maximum 20 methods for gas valve switching. Our gas sampling valve is operated by an air actuator and provided with various gas sample loops. For the analysis of samples including O<sub>2</sub> and N<sub>2</sub> in very low trace level, a purge housing is very useful to eliminate any possible diffusion from the atmosphere into the valve and safely vent fugitive emissions.

## Pyrolyzer, Pyroprobe 5000 series

Pyrolyzer coupled with YL6500 GC allows you to analyze the samples which were previously unsuitable for analysis without extractions or derivatizations.

By using a pyrolyzer, samples such as paint, tapes, caulk, adhesives, food packaging, rubber, plastic, papers, ink, coating and a full range of household products can be analyzed for qualitative and quantitative information.



## Rapid Oven Cooler (ROC)

Rapid Oven Cooler is simple, affordable and easy to be installed on most GC and GC/MS available on the market. It considerably reduces dead time between sequential runs and ensures highly stable GC oven temperatures, down to 20°C, very rapidly to increase lab productivity. Analyzing very volatile compounds, it's strongly recommended to improve significantly high resolution.



# YL9100 HPLC

YL9100 HPLC is built to provide an exceptional cost/performance ratio. Our pumps (YL9110/9111/9112) deliver accurate and precise flow rates to make very stable baseline. The effective temperature control by column compartment (YL9131) ensures retention time reproducibility and reliable data. Also, the innovative optic design of UV/Vis detector (YL9120) enhances light intensity as well as high sensitivity over the entire wavelength range. It is easy to configure YL9100 HPLC depending on a specified application with various detectors, pumps and sample preparation systems.

## Standard Configuration

### ■ YL9101 Vacuum Degasser

- Number of channel: 4 CHs
- Maximum flow rate: 10 ml/min per channel (Analytical)  
50 ml/min per channel (Semi-prep)
- Internal volume per channel  
: 925 µl per channel
- Solvent contact materials  
: Teflon<sup>®</sup> AF and PEEK

### ■ YL9110 Quaternary Pump

- Number of solvents: up to 4 solvents
- Gradient formation: 4-channel mixing valve
- Composition precision: < 0.1 %
- Composition accuracy: < 0.5 %
- Flow range: 0.001~10 ml/min (Analytical)  
0.01~50 ml/min (Semi-prep)

\* Binary and isocratic pumps are also available.

### ■ YL9131 Column Compartment

- Temperature range: 4 °C (Cooling) - 90 °C
- Temperature stability: ±0.05 °C
- Temperature programs: 40 steps
- Column capacity: Max. 3 ea of 30 cm column (Analytical)  
Max. 2 ea of 30 cm column (Semi-prep)
- Column switching: Automatic 6-port valve up to 2 ea (Option)

### ■ YL9120 UV/Vis Detector

- Wavelength range: 190~900 nm
- Light source: Deuterium arc lamp & Tungsten lamp
- Linearity: > 99.5% at 2.0 AU (Acetone, 254 nm)
- Noise level: < ±0.5 X 10<sup>-5</sup> AU, 254 nm, dry cell
- Drift: < 1 X 10<sup>-4</sup> AU/hour
- Spectral bandwidth: 5.5 nm

### ■ YL-Clarity/Autochro-3000 CDS

- US FDA 21 CFR Part 11 compliance
- Simultaneous data acquisition up to 4 independent chromatographs
- Various analysis method applications
- PDA/GPC/SST/Validation Kit (Option)



Isocratic, semi-prep and GPC systems are also available.

## Other Detectors

### ■ YL9160 PDA (Photodiode Array) Detector

- No. of PDA Channel: 1024
- Wavelength: 190~950 nm
- Noise level :  $< \pm 1 \times 10^{-5}$  AU (Empty Cell, 2 sec Time constant, 254 nm)
- Drift :  $< 2 \times 10^{-4}$  AU/hour (Baseline Correction),  $1 \times 10^{-3}$  AU/hour (Room Temp.)
- Confidence in peak purity calculations
- GLP compliance: Photometric Accuracy / Linearity, Noise Level & Drift System Check



### ■ YL9170 RID (Refractive Index Detector)

- Noise:  $\leq 5 \times 10^{-9}$  RIU (Analytical) /  $\leq 10 \times 10^{-8}$  RIU (Semi-prep)
- Differential refractive index
- Economical detector for GPC
- Flow cell volume: 9  $\mu$ l (Analytical) / 7  $\mu$ l (Semi-prep)



### ■ YL9180 ELSD

- More sensitive
- General laboratory

### ■ YL9181 ELSD (Evaporative Light Scattering Detector)

- Highly sensitive
- Advanced research
- Cooling down to 10°C for chamber

- Patented thermo-split: Vapor phase control for optimum sensitivity
- Very low detector volume resulting in the smallest peak within 3 sec
- A single multi-flow, nebulizer for use with micro-bore to semi-preparative flow rates



### ■ ECD (Electrochemical Detector)

- Various application such as biogenic amine, phenol, vitamin, DNA adduct, inorganic ions and amino acids

### ■ FLD (Fluorescence Detector)

- Great accuracy and precision
- Emission monitoring of fluorescence, phosphorescence, and chemiluminescence
- High sensitivity at both lower and higher excitation wavelengths

## YL9300 HPLC

YL9300 HPLC is an integrated HPLC system in a compact design including a vacuum degasser (mixer), quaternary pump and UV/Vis detector at a competitive price. The focus corrected optical design efficiently reduces mobile phase RI effect and provides enhanced baseline stability with a substantially minimized noise level especially in short wavelength range, which brings decreased solvent related peaks.

### ■ Vacuum Degasser

- Number of channel: 4 CHs
- Maximum flow rate: 10 ml/min per channel
- Internal volume per channel: 925  $\mu$ l per channel
- Materials in contact with solvent: Teflon AF, PEEK and Glass-filled PTFE

### ■ Quaternary Pump

- Flow range: 0.001-5 ml/min (Standard)  
0.001-10 ml/min (Option)
- Flow rate accuracy:  $\leq \pm 1$  % at 1 ml/min
- Flow rate precision:  $< 0.1$  % RSD at 1 ml/min
- Number of eluent lines: 4
- Pressure pulsation:  $\leq \pm 0.5$  % at 1 ml/min

### ■ UV/VIS Detector

- Wavelength range: 190~600 nm (Standard)  
190~900 nm (Option)
- Spectral bandwidth: 5 nm
- Wavelength accuracy:  $\pm 1$  nm
- Wavelength precision:  $\pm 0.1$  nm
- Linearity:  $> 99.5$  % at 2.5 AU (Acetone, 254 nm)
- Noise level:  $< \pm 0.35 \times 10^{-5}$  AU, 254 nm, dry cell
- Drift:  $< 1 \times 10^{-4}$  AU/hour

### ■ System Information

- Data communications: LAN
- Dimensions: 375 X 470 X 545 mm (W X H X D)
- Weight: 27 Kg
- Safety & maintenance: Leak detection, Diagnostics, Error detection
- Power consumption: 150 W



## Stand-alone Solution



### TP Control Module for YL9100 Series Pump

This pump key controller is for the use of process or a single unit itself. It can control all functions of pump and indicate each factor clearly.

#### Functions

- Method programming
- Solvent mixing rate
- Prime / Purge
- Flow calibration
- Maintenance control
- Pressure zero

#### Features

- 4.2 inch wide, vivid and sensitive LCD touch screen
- Logical instrument monitoring
- Method programming and keeping
- For the use of process / single unit



### SP930D Solvent Delivery Pump

SP930D Solvent Delivery Pump is to be provided for the use of process where requires to supply accurate and precise solvent flow rate as a stand-alone unit. It can also be added to other HPLCs easily and controlled by an intuitive key pad.

- Operating flow range: Analytical 0.001-16.0 ml/min
- Flow precision:  $< \pm 0.1\%$  RSD at 1 ml/min
- Flow accuracy:  $< \pm 1\%$
- Operating pressure: 0-6,000 psi

## HPLC Automation

### YL9150 Autosampler (Alias)

Controllable whole process, from the injection to the analysis report, for your convenience. The compact, stackable design and its economic pricing make this autosampler the best choice for a large variety of HPLC applications.

Injection Range	1 $\mu$ l-9999 $\mu$ l programmable, 1 $\mu$ l increments
Sample Capacity	2 well plates 96 or 384 (deep or shallow); 96 vials (1.5 ml); Option: 24 vials (10 ml)
Injection Precision	RSD for injection volume $> 10\ \mu$ l Full-loop: 0.3 %, Partial-loop: 0.5 %, $\mu$ l-pick-up: 1.0 %
Carry-over	$< 0.05\%$ with standard wash Typically $< 0.01\%$ with extra wash



### YL9151 Autosampler (Optimas)

YL9151 provides the optimum balance of economics and performance by optimizing your injection and automation with a carousel holder for sample vial flexibility.



## Others

### Column Switching Valve

#### MX Series II™ (Stand-alone)

MX Series II™ automated high-pressure fluidic valves provides productivity enhancing solutions for today's demanding analytical methods. Combine MX Series II modular valves with your current instrument to support complex fluid switching and sample injection needs.

#### TitanHP™

TitanHP™ consists of an integrated driver/actuator and a removable liquid-end (Rapid Replacement Pod™) to provide a single, flexible space-saving design. Eliminating the need for development of an internal board and firmware means shorter product development cycles and reduced time-to-market.

DuraLife® wear surfaces extends valve lifetime, which means reduced field service and more customer analysis time between replacements of the wetted surfaces.

### Rheodyne Manual Injector

- Industrial standard manual injector
- Analytical: 7725i (SUS) and 9725i (PEEK)
- Semi-prep: 3725i

# WPS (Water Purification System)

Various aquaMAX™ Water Purification Systems have been developed to meet the ideal water quality for your analytical and bioscientific requirements. We provide 4 types of model for each series to satisfy your application.



## aquaMAX™-Basic 360 series

- **The Highest Water Quality**
  - Easy to upgrade by adding R.O Post pack to produce Type II water (ASTM)
  - Auto-rinsing to keep constant water quality
  - Sensing cell to display accurate water quality (Conductivity & Resistivity) by automatic temperature compensation
- **Convenience for Users**
  - One-touch clip type filters: Easy to replace filters by user
  - Monitoring self test, filter replacement, auto-rinsing and service check
  - Separated modules for easy maintenance
- **Safety Function**
  - Pressure regulator to prevent the instrument from damages by constant pressure.
  - Pressure blocking: High and low pressure limit blocking for safe operation.
- **Attractive Price**
  - The higher water quality you get, the lower cost we provide.

## aquaMAX™-Ultra 370 series

- **The Highest Water Quality**
  - aquaMAX™- Ultra produces Type I grade in electrical resistivity  $18.2 \text{ M}\Omega \cdot \text{cm}$  and TOC level less than 10 ppb.
  - The water quality of aquaMAX™- Ultra complies with ASTM, CAP, ACS and NCCLS to be used with HPLC, GC, IC, AAS, ICP and ICP - MS.
- **Resistivity Measurement**
  - Measuring the resistivity by automatic temperature compensation for accurate measurement
  - Easy to select temp. compensation at your fingertips
- **Ultra Pack**
  - Perfect removal of inorganics
- **UF Filter**
  - Reducing Pyrogen to 0.06 Eu/ml. by Polysulphone membrane
- **UV Filter**
  - Significantly low TOC level ( $< 5 \text{ ppb}$ ) for preparation of ultratrace analysis
- **0.2  $\mu\text{m}$  Final Filter**
  - Final filtering of impurities for produced water and prevention of contamination at drain



# AAS 8000 Series (Atomic Absorption Spectrometer)

YL AAS-8000 Series Atomic Absorption Spectrometer has been developed with our accumulated experience in analytical instruments. YL AAS-8000 Series will satisfy all demands by providing excellent performance with reliable and accurate data.



## AAS 8020 Fully Automatic Flame/Graphite Furnace AAS

- Easy switching between Flame and Graphite Furnace

## AAS 8010 Fully Automatic Flame AAS

### Specification

Wavelength Range	190 nm~900 nm	Spectrum Bandwidth	5 steps: 0.1 nm, 0.2 nm, 0.4 nm, 1.0 nm and 2.0 nm, respectively
Grating	1800 lines/mm	Mono-Chromator	Czemy-Tuner Grating Mono-Chromator
Wavelength Repeatability	Full Wavelength $\leq \pm 0.1$ nm	Background Calibration	> 50 times
Blaze Wavelength	250 nm	Accuracy	Full Wavelength $\leq \pm 0.2$ nm
Focal Length	300 mm	Resolution	Better than 0.3 nm

### Features

- Fully controlled by PC
- Automatic wavelength set-up/ Automatic slit switching/ Automatic lamp current and gain set-up within 40 seconds
- Easy button switching and control of 6 lamps on a rolling turret
- Automatic flame ignition/ Automatic flow control for gases and gas leak detection
- Nitrous Oxide Gas/Acetylene Gas selection (Option) to analyze elements under the condition of high temperature
- The use of advanced 1,800 lines/mm grating for strong energy and high resolution
- Compatible with MS Windows OS and user-friendly graphical user interface

### Related Products

- HG 8000 Hydride Generator
- Water Cooling Chamber
- AS-GF Autosampler for Graphite Furnace
- AS-F Autosampler for Flame

# Gas Generator

YL Instruments provides gas generators for the use of your appropriate application where requires high purity gases securing your safety, improving lab efficiency as well as ensuring superior results at a economical price.

## Nitrogen Generator



N2-Whisper-C-35



N2-C-500

### Whisper-N<sub>2</sub> Series

	Model	Flow Rate	Application
Compressor Built-in	N <sub>2</sub> -Whisper-C-35	35 L/min	with LC-MS
	N <sub>2</sub> -Whisper-Hybrid	5 L/min (80psi)	N <sub>2</sub> /Air Generation
External Compressor	N <sub>2</sub> -Mini-Whisper	8 L/min	with ELSD
	N <sub>2</sub> -Whisper-0 Series	40, 80, 120 L/min	Large N <sub>2</sub> volumes

### High Purity N<sub>2</sub> Series

	Model	Flow Rate	Purity	Application
Compressor Built-in	N <sub>2</sub> -C-500	500 ml/min	99.999 %	GC carrier gas, ICP, ELSD, etc.
	N <sub>2</sub> -C-750	750 ml/min		
	N <sub>2</sub> -C-1300	1300 ml/min	99.995 %	
	N <sub>2</sub> -C-4000	4000 ml/min	98 %	
No Compressor	N <sub>2</sub> -NC-500	500 ml/min	99.999 %	
	N <sub>2</sub> -NC-750	750 ml/min		
	N <sub>2</sub> -NC-1300	1300 ml/min	99.995 %	
	N <sub>2</sub> -NC-4000	4000 ml/min	98 %	

## Hydrogen Generator



NM-H<sub>2</sub>-Series



PG-H<sub>2</sub>-Series

### NM-H<sub>2</sub> Series

Model	NM-H <sub>2</sub> -Series
Flow Rate	100-160-250-300-500-600-1000 ml/min
Dryer	Exclusive Dual Automatic Regeneration System
Purity	99.9999 %
Cascading	NM-H <sub>2</sub> -250/300/500/600/1000
Application	- GC & GC-MS: Flame Ionization Detector(FID), Carrier gas -Fast GC, Collisions: ICP-MS - Small Fuel-Cell Cylinder Refills

### PG-H<sub>2</sub> Series

Model	PG-H <sub>2</sub> -Series
Flow Rate	100-160-250-300-500-600 ml/min
Electrolysis Cell	Membrane Type
Purity	99.999 %
Cascading	PG-H <sub>2</sub> -250/300/500/600 (Requires I/O Board: Option)

## Zero Air Generator



Zero Air



Ultra Zero Air

### GC Series (Zero Air)

Model	Flow Rate	HC & CO out	Applications
GC-1500	1.5 L/min	< 0.1 ppm	GC-FID/ GC-NPD/ GC-FPD/ GC-PFPD, THA, Flame Gas
GC-3000	3 L/min		
GC-6000	6 L/min		
GC-15000	15 L/min		
GC-30000	30 L/min		

### GT Series (Ultra Zero Air)

Model	Flow Rate	HC & CO out	CO <sub>2</sub> out	NO <sub>x</sub> , SO <sub>x</sub> out	Applications
GT-1500	1.5 L/min	< 0.1 ppm	< 5 ppm	< 0.1 ppm	GC-FID/ GC-NPD/ GC-FPD/ GC-PFPD, THA, Flame Gas, HTC, TOC, ELSD, TGA, DSC
GT-3000	3 L/min				
GT-6000	6 L/min				
GT-15000	15 L/min				
GT-30000	30 L/min				

# FT-IR (Fourier Transform Infrared Spectrometer)

YL FT-IR Series brings both high performance and cost efficiency. With a sophisticated interferometer design, YL FT-IR Series delivers reliable and reproducible data ensuring excellent and stable light source.

## Features

- No interference of humidity by a desiccated and sealed interferometer
- Stable wavelength emission by air cooled infrared sources
- Self compensating alignment at an optical system
- Ease of use with an intuitive software
- DLATGS Detector with high sensitivity and excellent linearity

## Applications

- Polymer analysis
- Foods research
- Quality assurance and control
- Pharmaceutical research
- Lubricant formulation and fuel additives
- Environmental and water quality analysis methods
- Biochemical and biomedical research
- Education analysis



YL2000 FT-IR (Bench-Top)



YL2300 FT-IR (Portable)

## Specifications

	YL2000 FT-IR	YL2300 FT-IR
Wavelength Range, IR	7800 to 380 $\text{cm}^{-1}$	7000 to 400 $\text{cm}^{-1}$ (without ATR accessory)
Wavelength Range, NIR	15000 to 3850 $\text{cm}^{-1}$	15000 to 3850 $\text{cm}^{-1}$
Spectral Resolution (Standard)	1 $\text{cm}^{-1}$ (8 $\text{cm}^{-1}$ - NIR)	2 $\text{cm}^{-1}$ (8 $\text{cm}^{-1}$ - NIR)
Spectral Resolution (Option)	0.5 $\text{cm}^{-1}$	1.0 or 0.5 $\text{cm}^{-1}$
Interferometer	Self aligning	Self aligning
Beamsplitter, Standard IR	Multicoated KBr	Multicoated KBr
Frequency Reference	HeNe laser	HeNe laser
IR Source	High intensity air cooled	High intensity air cooled
Detector, IR Standard	Low noise DLATGS	Low noise DLATGS
Detector, IR Option	MCT	-

# Concentration Evaporator

YL Concentration Evaporators are microprocessor-controlled evaporation systems for simultaneous and automated concentration of multiple samples with unattended operation, convenience, high speed and economical cost.



Hurricane-EX



Hurricane-Elcap



Windy-i



Windy-R

## Specifications

	Hurricane-EX	Hurricane-Eagle	Hurricane-Elcap	Windy-i	Windy-R
Sample Volume	Max. 30 ml	Max. 30 ml	Max. 300 ml	Max. 8 ml	Max. 30 ml
Number of Samples	24 samples	50 samples	21 / 15 / 12 / 8 samples	6 samples	24 samples
Time Programming Range	5 min upto 24 hrs (Increment: 5 min)	5 min upto 24 hrs (Increment: 5 min)	5 min upto 24 hrs (Increment: 5 min)	5 min upto 24 hrs (Increment: 5 min)	5 min upto 24 hrs (Increment: 5 min)
Water Bath Temperature	Ambient to 90 °C (Increment: 5 °C)	Ambient to 90 °C (Increment: 5 °C)	Ambient to 90 °C (Increment: 5 °C)	Ambient to 90 °C (Increment: 5 °C)	Ambient to 90 °C (Increment: 5 °C)
Water Bath Size(mm)	290 X 140 X 160	355 X 195 X 170	355 X 195 X 170	Heating Block type 200 X 40 X 90	Heating Block type 300 X 130 X 170
Gas Supply Flow	15 L/min	15 L/min	15 L/min	12 L/min	15 L/min
Inlet Pressure	Max. 140 psi	Max. 140 psi	Max. 140 psi	Max. 90 psi	Max. 140 psi

# Nano Particle Size Analyzer

Nano particle size analyzer meets the requirement of fast and accurate “particle sizing” in Nano-Technologies based on “Photon Correlation Spectroscopy (PCS)”. It is easy to measure the particle size in a wide measurable size range (1~7000 nm) with Scatterscope series ensuring high resolution and repeatability.



[Scatterscope I]



[Scatterscope II: On/In-line process monitoring]

## World Wide Distributor

Algeria	<b>SINAL sarl. Group</b> Tel: 00 213 41 414 253 e-mail : a.bekt@sinaldz.com	India	<b>PG TECH PVT. LTD. (Delhi)</b> :MPUP,Rajasthan,Chhatisgarh, New Delhi, Punjab, Haryana HP, J & K, Uttaranchal Tel: 91-98260-42410 e-mail: info@pgtech.in <b>Samarth Instruments(Baroda)</b> :Gujarat, Maharashtra, Goa Tel/fax: 91-265-2357609 e-mail: samarthibrd@sify.com <b>Rions India</b> :Non Exclusive for WPS Tel: 91 11 29233295 e-mail : rions@vsnl.net <b>Orange Bio Science Products Pvt. Ltd.</b> :Bihar, Jharkhand, West Bengal, Orissa Tel: 91-33-24191876 e-mail : info@orangebioscience.com <b>MSP Lab Instrument</b> :Andhra Pradesh, Karnataka Tel: 91-40-3077763 e-mail : msp@binsstruments@gmail.com <b>Kunash Instruments Pvt.Ltd.</b> :Tamil Nadu, Kerala Tel: +91 999437998 e-mail : kunashinstruments@vsnl.net	Russia (Moscow)	<b>JSC Pribor.RU</b> Tel: +7 (495) 651-9180 e-mail : omatveev@zaopribor.ru
Argentina	<b>Lab Solutions SRL</b> Tel: +54-11-4542-4911 e-mail : ariel.ciarlo@absolutions.com.ar	Indonesia	<b>PT.Trikarsa Inc</b> Tel: +62-21-475877 e-mail: soniss@trikarsa.co.id	Russia (Vladivostok)	<b>Dallanalit Co. Ltd</b> Tel: +7 4232 700 587 e-mail : Kovashnatalia@yahoo.com
Bangladesh	<b>Labomed</b> Tel: 880 2 8900479 e-mail : labomedbd@yahoo.com	Iran	<b>Kimia Sanat Jahan Company</b> Tel: 98-21-2290-1482 e-mail : info@kimiaco.net	Serbia	<b>Cluster d.o.o.</b> Tel: 381 (0)11 3755 899 e-mail : blagoje.velickovic@cluster.co.rs
Brazil	<b>Allcrom</b> Tel: (11)3464 8900 e-mail : allcrom@allcrom.com.br	Israel	<b>Lumitron(2008)LTD.</b> Tel: +972- 8-9293355 e-mail : anik.w@lumitron.co.il	Slovakia	<b>Anka sro.</b> Tel: +421 905750050 e-mail : jskubak@centrum.sk
Canada/Morocco	<b>Zef Scientific</b> Tel: 514-685-1544 e-mail: patrizia@zefsci.com	Italy	<b>EsseCi Group s.r.l.</b> Tel: 031/48.19.19 e-mail : info@esscigroup.it	South Africa	<b>Trilab Support</b> Tel: 27-031-700 6050 e-mail : simon.hunter@trilab.co.za
Chile	<b>ESPECTRO CIENCIA</b> Tel: (56-2)310 53 70 e-mail : adroguett@espectrociencia.cl	Jordan	<b>TAAWON Co.</b> Tel: +962 6 4654704 e-mail : hassan.hariss@taawon.me	Spain	<b>Micron Analitica S.A.</b> Tel: 91 413 11 82 Fax: 91 413 22 90 e-mail : carlos-micron@auna.com
China	<b>Young Lin Science &amp; Trading (Beijing) Co., Ltd.</b> Tel: 86-10-65305160 e-mail: info@younglin.com.cn	Kazakhstan	<b>LaborPharma Ltd.</b> Tel: 7-327-258-35-85 e-mail : info@laborg.kz	Sweden	<b>DALCO Chromtech</b> Tel: +46(0)8 59 49 6969 e-mail : mathias.lundgren@dalcochromtech.se
Colombia	<b>GRUPO ALIANZA ESTRATEGICA GAE LTDA.</b> Tel: (571) 2022632 e-mail : cesar.marino@gaeltda.com	Latvia	<b>Faneks Ltd.</b> Tel: 371-7334646 e-mail : viktors@faneks.lv	Switzerland	<b>TecDev</b> Tel: 41 24 435 2202 e-mail : tecdev@swissonline.ch
Croatia	<b>Ansar-Analitika d.o.o</b> Tel: +385 1 3745 690 e-mail : kreso.mesarek@ck.t-com.hr	Malaysia	<b>Analisa Resources</b> Tel: 603-7880-6217 e-mail : lthang@analisa-scientific.com	Syria	<b>Lab Technology</b> Tel: 00963- 21- 22 78 489 e-mail : lab-tech@scs-net.org
Czech Republic	<b>LABICOM s.r.o.</b> Tel/Fax: +420 585436915 e-mail : vera.tatarovicova@labicom.cz	Nigeria	<b>INSTERTECK</b> Tel: 062 232 808 e-mail : instert@yaho.com	Taiwan	<b>Vastech Scientific</b> Tel: 886-2-2550-9431 e-mail : Thomas@vastech.com.tw
Denmark	<b>MD Scientific ApS</b> Tel: +45 7027 8565 e-mail : marekd@md-scientific.dk	Pakistan	<b>Physionics Medical,Scientific&amp;Teaching Aid</b> Tel: +9221-4141911 e-mail : fakhre.islam@physionics.net	Thailand	<b>Ligand Scientific Co., Ltd</b> Tel: 662-9538-088-9 e-mail: ligand@ligandsci.com
Ecuador	<b>InstrulabQ</b> Tel: 593 2 3520 340 e-mail : nelsongarcia@instrulabq.com <b>ELICROM CIA. LTDA.</b> Tel: 593-4-2282007 Ext.401 e-mail : elicrom@elicrom.com	Panama/Cuba	<b>KAIA B.I. S.A</b> Tel: 507-203-2244 e-mail : asti@enet.cu	Tunisia	<b>Analytica</b> Tel/Fax: (216) 70 559 098 e-mail: analytica@planet.tn
Egypt	<b>Peak Scientific Instruments S.A.E.</b> Tel: 2-02-226-15413 e-mail : psisaee@link.net	Poland	<b>TLab Technika Laboratoryjna</b> Tel: +48 22 435 81 02 e-mail : jaroczajka@wp.pl	Turkey	<b>Pro Analytik LTD STI</b> Tel: 90 - 212 - 544 8222 e-mail: tuncay@proanalitik.com
France	<b>Tecora</b> Tel: + 33 6 72 68 13 14 e-mail : yves.arnaud@tecora.com	Portugal	<b>Cromolab, Lda.</b> Telefone: +351 214 182 142 e-mail : info@cromolab.pt	UAE/Oman/ Kuwait	<b>Lab Gulf</b> Tel: (+971) 6 557 9893 e-mail: labgulf@eim.ae
Germany	<b>Techlab GmbH</b> Tel: 05305/930205 e-mail : roepke@techlab.de			United Kingdom	<b>CE Instruments Ltd.</b> Tel: 44-1942-733-362 e-mail: enquiries@ceinstruments.co.uk <b>Presearch Limited</b> Tel: 49-5305/930205 e-mail: shahedkarolia@presearch.co.uk <b>NLG Labserv Ltd.</b> Tel: +44-162-583-8909 e-mail: nlg@labserv.gna.ie
Greece	<b>Metro Lab</b> Tel: 30-210-646 8840 e-mail : pkapetis@metrolab.gr			Ukraine	<b>Baltic Bio Trade LLC</b> Tel: +380 44 459 42 31 e-mail: s.sergey@balticbiotrade.com.ua
Hungary	<b>Edison House Holding Zrt.</b> Tel: +36 29 562 020 e-mail: info@edisonhouse.hu <b>Today Science Kft.</b> Tel/Fax: +36 23 357 036 e-mail : robert.pal@today.hu			Vietnam	<b>SAO Viet Technologies</b> Tel: 84-8-2-678-348 e-mail: vietstars@vnn.vn

## History

- 1988 AquaPuri 312 Laboratory Water Purification System
- 1989 Development of First HPLC
- 1991 Development of First GC
- 1998 Acquired EM [Excellent Machine, Material, Mechanism] Mark for 600D GC
- 1999 Award for Advanced Technology from Korea Chemical Society
- Received Presidential Award for New Technology & Practice for 600D GC from Ministry of CIE
- 2000 Certified for ISO 9001 Quality Assurance System
- 2001 Acquired CE Mark for HPLC
- 2002 Acquired NT Mark for Advanced Pneumatic Control of Acme 6000 GC
- 2004 Acme6000 GC selected as one of Top Quality Products from Supply Administration Republic of Korea
- 2005 Pattern Approval Certificate of the Measuring Instruments of China for Acme 9000 HPLC
- 2006 Development of YL6100 GC / New WPS / Autochro-3000 Data System
- 2007 Acquired CE Mark for GC, AAS & New WPS
- 2008 Development of YL9100 HPLC & YL-Clarity Chromatography Data System
- 2009 Acquired CE Mark for YL9100 HPLC
- 2011 Development of YL FT-IR / Gas Generator / Concentration Evaporator
- Development of YL6500 GC
- 2012 Development of YL9300 HPLC
- Development of AUTOCHRO 2



## YL INSTRUMENT CO., LTD.

Young Lin Bldg., 899-6, Hogley-dong, Anyang, 431-836, Korea  
TEL: 82-31-428-8700 / FAX: 82-31-428-8779  
E-mail: export@younglin.com  
Homepage: www.ylinstrument.com



These Products are manufactured by Young Lin ISO 9001-certified facility that is periodically audited by the registering body to ensure compliance